



USF

Conventional Rigid PCB Drill

Design Feature

Drill type: UC type, double edge single flute



High rigidity and chip removal capability, excellent overall performance

Application

Suitable for substrates, high layer automotive PCB, HDI etc

Benefit

Excellent hole registration

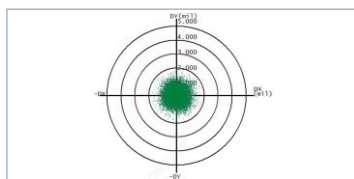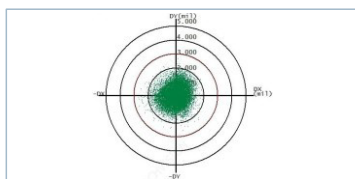

Dia. [mm]	Flute Length [mm]	Dia. [mm]	Flute Length [mm]
0.075	1.2	0.15	4.0
0.11	1.8	0.20	3.5
0.11	2.2	0.20	4.0
0.13	2.5	0.20	4.5
0.13	3.0	0.20	5.0
0.13	3.5	0.225	4.5
0.15	2.5	0.225	5.0
0.15	3.0	0.225	5.5
0.15	3.5	0.25	4.5

Dia. [mm]	Flute Length [mm]	Dia. [mm]	Flute Length [mm]	Dia. [mm]	Flute Length [mm]	Dia. [mm]	Flute Length [mm]
0.25	5.0	0.45	7.0	0.65	7.0	0.85	7.0
0.25	5.5	0.45	8.5	0.65	8.5	0.85	9.5
0.25	6.2	0.50	7.0	0.70	7.0	0.90	7.0
0.30	5.5	0.50	8.5	0.70	8.5	0.90	9.5
0.30	6.2	0.55	7.0	0.75	7.0	0.95	7.0
0.35	5.5	0.55	8.5	0.75	8.5	0.95	9.5
0.35	6.5	0.60	7.0	0.80	7.0	1.00	7.0
0.40	7.0	0.60	8.5	0.80	9.5	1.00	10.5
0.40	8.5						

*Able to add lubricated coating and wear resistant coating
*Normal specification is shown in the table, please ask sales for customized specification

