



ThinFlex



ThinFlex Corporation

No. 8, Luke 2nd.Rd., Luzhu Dist., Kaohsiung City, 821, Taiwan, R.O.C. (Kaohsiung Science Park) Tel: +886-7-6955236 Fax: +886-7-6955539 http://www.thinflex.com.tw e-mail: service@thinflex.com.tw

# ThinFlex-A, A-3005RD Adhesiveless Double Sided Copper Clad Laminate (Halogen Free)

IPC Designation IPC-4204/11

ThinFlex-A, A-3005RD is an adhesiveless double-sided (D/S) copper clad laminate, using UBE TPI film and laminated with RA copper foil on both sides. ThinFlex-A, A-3005RD adhesiveless D/S composites are designed for a wide variety of flexible circuit applications which require advanced material performance, temperature resistance, fine pitch, and high reliability.

## 1. Product Characteristics:

- \* Excellent dimensional stability
- \* Excellent flexibility
- \* Finer line etching capability
- \* Low moisture absorption
- \* Excellent flammability (Flame class UL 94V-0; UL File No. E219724)
- \* Excellent chemical resistance
- \* Excellent thermal, mechanical, and electrical properties

## 2. Specifications:

A - 30 05 R D

<b>Product</b> A : D/S FCCL	<b>Thickness of PI</b> 30 : 3.0 mil	<b>Thickness of Cu</b> 05 : 0.5oz	<b>Cu Type</b> R : RA	<b>Structure</b> Double-sided
<b>Supply Size</b>	W: 458 ± 1mm; L: 600 ± 2mm (sheet type)			

\*Other thicknesses and dimensions are available on customers' demand.




ThinFlex

Distributed by:  
**ventec**  
INTERNATIONAL GROUP  
騰輝電子

**ThinFlex Corporation**

No. 8, Luke 2nd.Rd., Luzhu Dist., Kaohsiung City, 821, Taiwan, R.O.C.  
(Kaohsiung Science Park)  
Tel: +886-7-6955236 Fax: +886-7-6955539  
http://www.thinflex.com.tw  
e-mail: service@thinflex.com.tw

### 3. Construction:

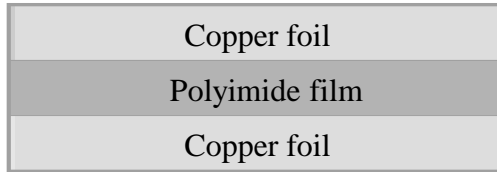

### 4. Properties:

IPC Designation IPC-4204/11

Test item	Unit	Specification	Typical Value	Test Method
<b>Peel Strength</b>				
As Received	Kgf/cm	≥ 1.0	1.8	IPC-TM650 2.4.9 B
Solder Float	Kgf/cm	≥ 1.0	1.8	IPC-TM650 2.4.13 B
After Temp. Cycling	Kgf/cm	≥ 1.0	1.8	IPC-TM650 2.4.9
Chemical Resistance	Kgf/cm	≥ 1.0	1.8	IPC-TM650 2.3.2
Tensile Strength (Base Film)	Kg/mm <sup>2</sup>	≥ 30	32	IPC-TM-650 2.4.19
Elongation (Base Film)	%	≥ 77	82	IPC-TM-650 2.4.19
Tensile Modulus (Base Film)	Kg/mm <sup>2</sup>	≥ 550	580	ASTM D882
Initial Tear Strength (Base Film)	g	≥ 2900	3000	IPC-TM-650 2.4.16
Propagation Tear Strength (Base Film)	g	≥ 45	48	IPC-TM-650 2.4.17.1
<b>Flexural Endurance, MIT</b>				
M.D.	Cycles	NA	NA	JIS-C 6471, 0.8mmR, 0.5kg
T.D.	Cycles	NA	NA	JIS-C 6471, 0.8mmR, 0.5kg
<b>Electrical Properties</b>				
Surface Resistance	Ω	~10 <sup>11</sup>	~10 <sup>12</sup>	IPC-TM650 2.5.17
Volume Resistance	Ω-cm	~10 <sup>12</sup>	~10 <sup>14</sup>	IPC-TM650 2.5.17
Insulation Resistance	Ω	~10 <sup>9</sup>	~10 <sup>10</sup>	IPC-TM650 2.6.3.2
Dielectric Strength	kV/mil	≥ 6.9	7.0	ASTM-D149
Dielectric Constant	-	≤ 3.3	3.2	IPC-TM650 2.5.5.3
Dissipation factor	-	≥ 0.002	0.003	IPC-TM650 2.5.5.3
<b>Physical and Thermal Properties</b>				
M.D.	%	-0.1~0.1	-0.08~0.08	IPC-TM650 2.2.4C
Dimensional Stability T.D.	%	-0.1~0.1	-0.08~0.08	IPC-TM650 2.2.4C
CTE	ppm/°C	≤ 19.3	19.0	ThinFlex
T <sub>g</sub>	°C	≥ 350	355	ThinFlex
Solder Float 10sec at 288°C (550°F)	-	Pass	Pass	IPC-TM650 2.4.13
Moisture Absorption Test	%	≤ 1.1	1.0	IPC-TM650 2.6.2
Chemical Resistance-single	-	Pass	Pass	IPC-TM650 2.3.2
Thickness tolerance	um	111±10%	110.8	ThinFlex
UL Flame Class	-	≤ V-0	V-0	UL94

\* Above data are typical values, and are not guaranteed values.



Distributed by:  
**ventec**  
INTERNATIONAL GROUP  
騰輝電子

**ThinFlex Corporation**

No. 8, Luke 2nd.Rd., Luzhu Dist., Kaohsiung City, 821, Taiwan, R.O.C.  
(Kaohsiung Science Park)  
Tel: +886-7-6955236 Fax: +886-7-6955539  
<http://www.thinflex.com.tw>  
e-mail: [service@thinflex.com.tw](mailto:service@thinflex.com.tw)

## 5. Storage:

ThinFlex-A, A-3005RD will meet its shelf-life for at least 12 months after arrival at the user's factory when stored in the original packaging at temperatures of below 25°C and below 70% humidity. The products do not need refrigeration and should not be frozen.

Note: The information and data contained in this technical literature is believed to be accurate and is offered in good faith for the benefit of the user. The user should make his own tests to verify the suitability of this product for any application before its use. All data are typical values only and subject to change without notice.

## ThinFlex Corporation

No.8, Luke 2<sup>nd</sup> Rd., Luzhu Dist., Kaohsiung City 821, Taiwan, R.O.C. (Kaohsiung Science Park)  
Tel: +886-7-6955236 Fax: +886-7-6955539  
<http://www.thinflex.com.tw>  
e-mail: [service@thinflex.com.tw](mailto:service@thinflex.com.tw)